Anwendung/Application :

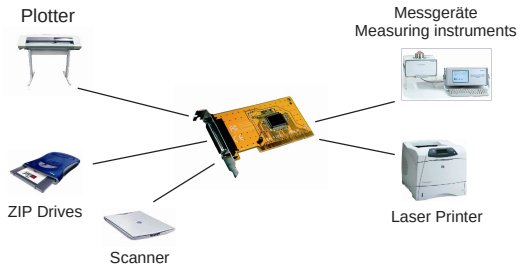

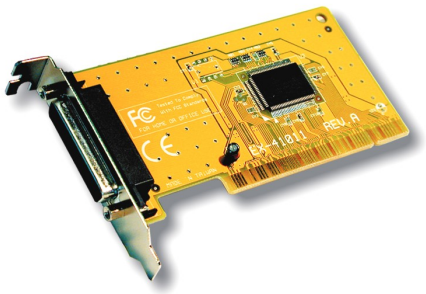

Operating System (OS): | Geprüft/Approved: | Verpackung/Packing:

WEEE Reg.Nr.: DE97424562

LowProfile 1P Parallel SPP/EPP/ECP PCI 32-Bit Karte

Beschreibung :	• Die EX-41211 LowProfile PCI Parallel Karte stellt einen Parallel SPP/EPP/ECP High Performance Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Parallele Ausgang für PC's, kleine Workstations oder Server über den PCI Bus zu erweitern. Die EX-41211 kann in schmale Gehäuse bis zu einer maximaler Bauhöhe von 8cm eingesetzt werden.
Merkmale :	• Universal PCI 32-Bit Parallel Karte mit einem Anschluss • Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Keine Jumper Einstellung erforderlich (nicht möglich) • Unterstützt Motherboard mit 5V und 3.3V
Chip-Set :	• Oxford OX12PCI840
Datentransfer-Rate :	• 2Mbyte/Sek.
Anschlüsse :	• 1 x 25 Pin D-SUB Parallel Buchse
Hardwaresysteme :	• PCI 32-Bit und PCI-X 64-Bit Bus
Betriebstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C (32 bis 131^{0}F) • 5 bis 95%
Abmessung / Gewicht :	• 120 x 63 mm / 100g
Lieferumfang :	• EX-41211 • Treiber CD • Handbuch

LowProfile 1P Parallel SPP/EPP/ECP PCI 32-Bit card

Description :	• The EX-41211 LowProfile PCI parallel adapter provides one SPP/EPP/ECP high performance ports. It is designed for PC´s, thin clients or server to provide instant LPT port expansion via the PCI- or PCI-X Bus. The card is fully Universal PCI Plug-and-Play compatible and no IRQ and I/O address conflict problems. The EX-41211 can be use for a small computer chassis of maximum 8cm high.
Feature :	• Universal PCI 32-Bit Parallel card with one port • Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • No Jumper setting • Support Motherboard with 5V and 3.3V
Chip-Set :	• Oxford OX12PCI840
Data transfer rate :	• 2Mbyte/Sec.
Connectors :	• 1 x 25 pin D-SUB parallel female connector
Hardware system :	• PCI 32-Bit and PCI-X 64-Bit Bus
Operating Temperature : Humidity :	• 0 to 55^{0}C (32 to 131^{0}F) • 5 to 95%
Size / Weight :	• 120 x 63 mm / 100g
Packaging contents :	• EX-41211 • Driver CD • Manual